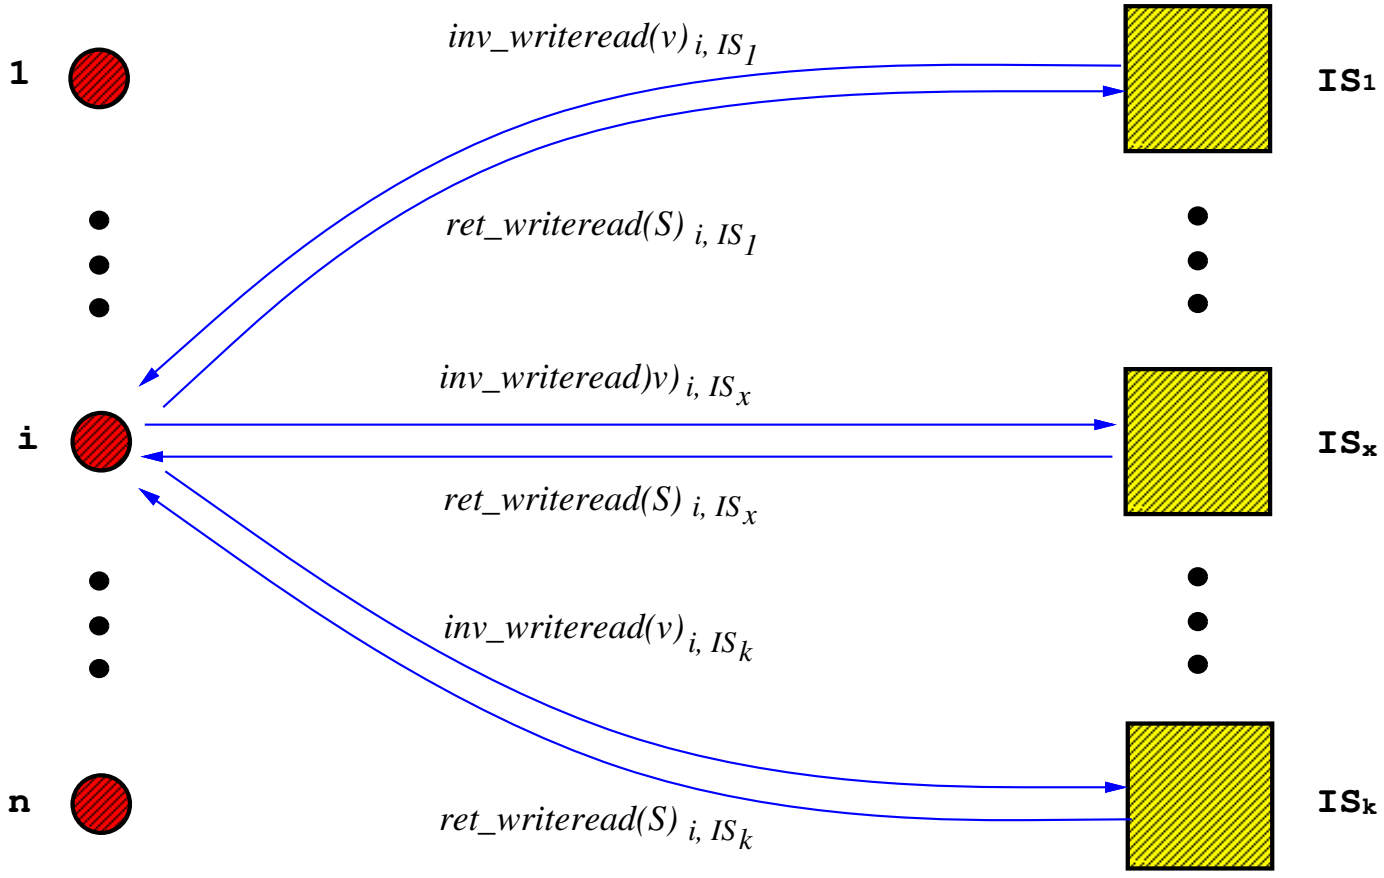
1
i
n
inv_writeread(v) i, IS1
ret_writeread(S) i, IS1
inv_writeread)v) i, ISx
ret_writeread(S) i, ISx
inv_writeread(v) i, ISk
ret_writeread(S) i, ISk
IS1
ISx
ISk