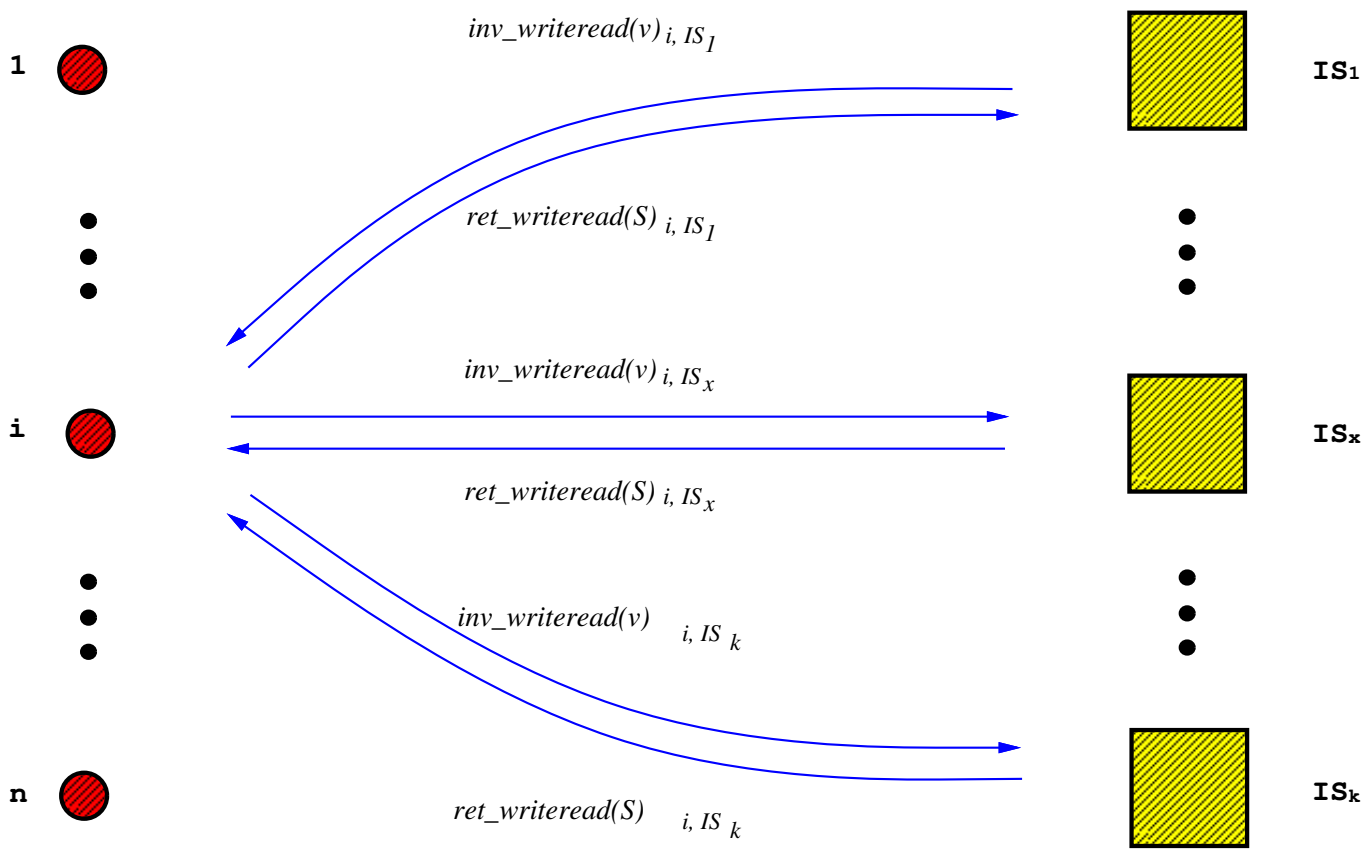
1
i
n
inv_writeread(v) i, IS1
ret_writeread(S) i, IS1
inv_writeread(v) i, ISx
ret_writeread(S) i, ISx
inv_writeread(v) i, IS k
ret_writeread(S) i, IS k
IS1
ISx
ISk